



- Cost Effective Solution to Protect High Wear Areas
- Base Welds to High Wear Areas
- Caps Are Easily Changed Without Hammers or Cutting Torches

1



Insert T-Nut into base.
Rotate 90 degrees.

2

Cap completely covers
base and holds nut
captive.

3

Cap is held in place
with single bolt.

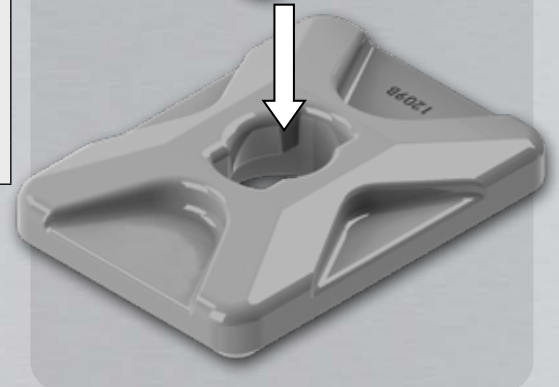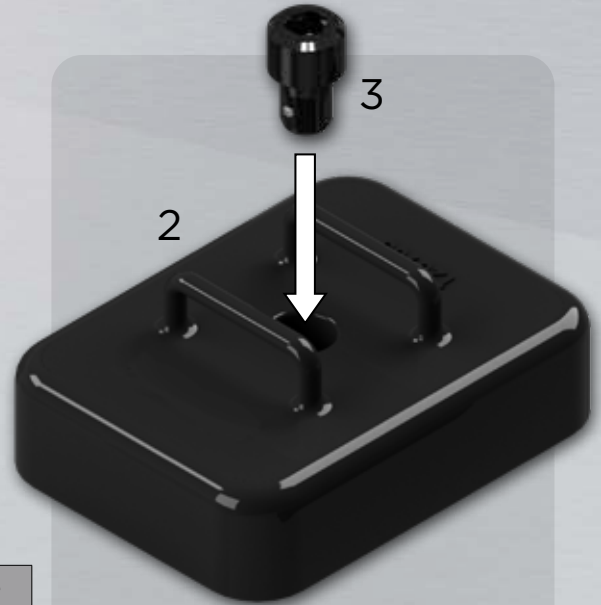


Part #	Description	Dimensions	Weight	Hardware
MAWC 1008B	Base	9" x 7" x 1.6"	20 lbs	Bolt - MAWC 050BPT Nut - MAWC 050NPT
MAWC 100802	Low Profile Cap	10" x 8" x 2.25"	26 lbs	
MAWC 1209B	Base	11" x 8" x 2"	35 lbs	Bolt - MAWC 075BPT Nut - MAWC 075NPT
MAWC 120903	Low Profile Cap	12" x 9" x 3"	48 lbs	
MAWC 1209035	Standard Cap	12" x 9" x 3.5"	64.5 lbs	
MAWC 120904	Heavy Duty Cap	12" x 9" x 4"	78 lbs	
MAWC 1409275T	Tapered Cap	14" x 9 x 2.75 "	50 lbs	



REVOLUTION

BLACK CAT HAMMERLESS PATENTED TECHNOLOGY

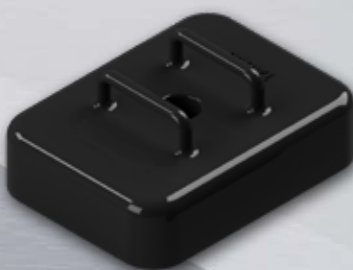

Standard



Tapered



Heavy Duty



Low Profile

960.0220

ACCESSORIES



www.BlackCatWearParts.com sales@blackcatwearparts.com Toll Free: 1.800.661.6666 T: 780.465.6666 F: 780.465.9595

Caterpillar® and other identities and/or trademarks referred to in this publication are the registered marks of the entities noted herein. The use of any trademarks of others than Black Cat Blades Ltd. are solely and exclusively for identification, informational, comparative, and descriptive purposes. Black Cat Blades Ltd. is not affiliated with any owner of such registered marks and does not make, use, or sell any products manufactured by any such entity identified in this publication.