




BLACK CAT
WEAR PARTS

**RVL
SYSTEMS**

for Applications on Caterpillar® Equipment

REVOLUTION
A Black Cat Innovation

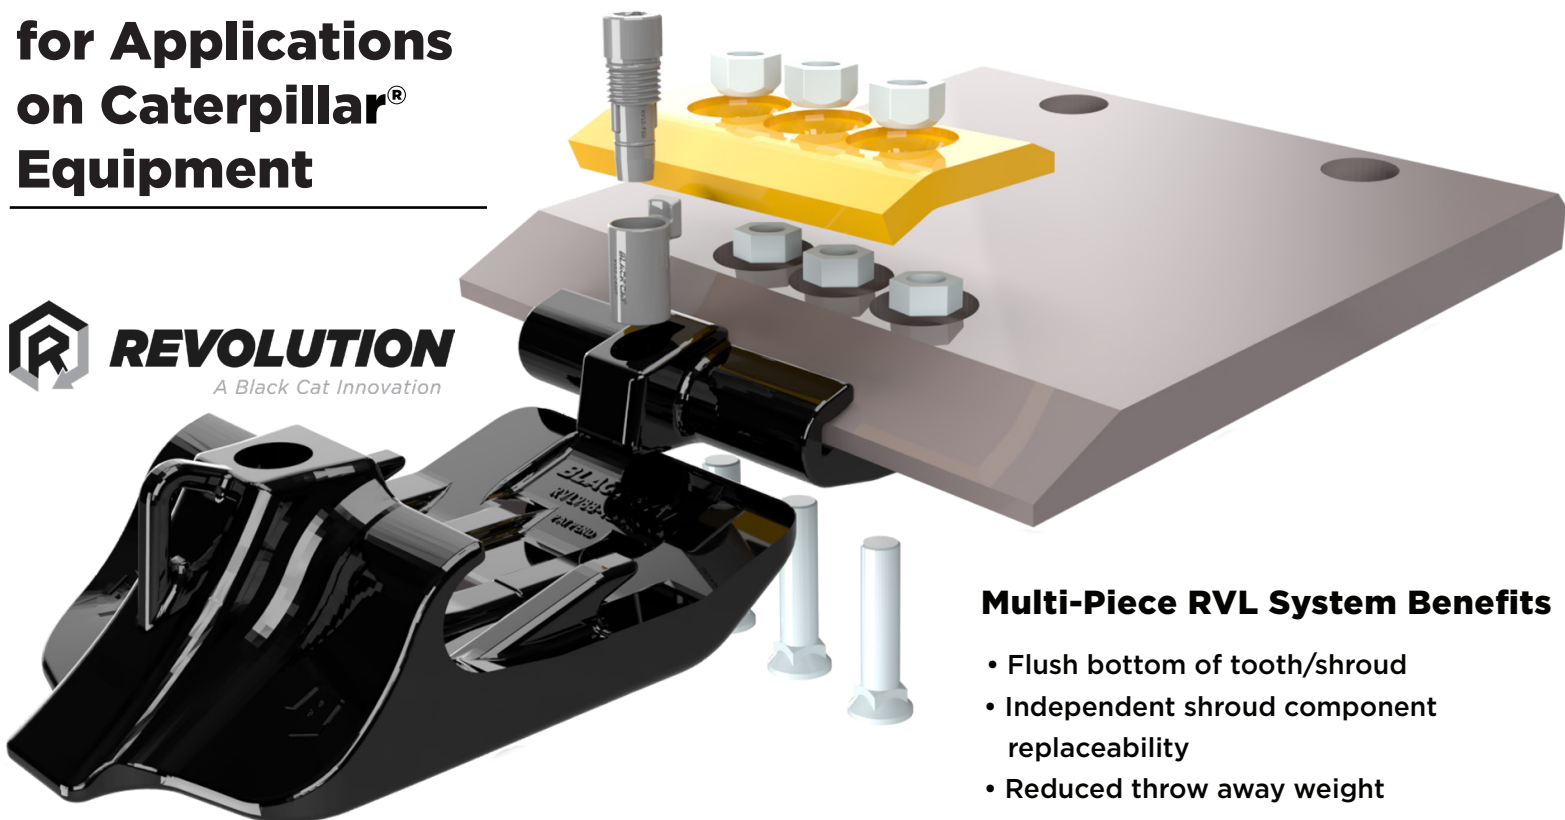

Multi-Piece RVL System Benefits

- Flush bottom of tooth/shroud
- Independent shroud component replaceability
- Reduced throw away weight
- Shroud base aligns with bottom of adapter nose

980/988

Replaces	Part Number	Weight	Dimensions				Top Plates
			Length	Thickness	1-3/4" and 2.00" Lips	2-1/2" Lips	
1167460	RVL988-1225C	123.0 lb 55.8 kg	12.25" 311 mm	3.35" 85 mm	RVL988B200C RVL988B200R RVL988B200L RVL2-C4369 Converter RVL2-P50 Pin	RVL988B250C RVL988B250R RVL988B250L RVL2-C4370 Converter RVL2-P50 Pin	RVL988TPC RVL988TPR RVL988TPL
1167461	RVL988-1225R						
1167462	RVL988-1225L						
1099080	RVL988-1350C	136.0 lb 61.7 kg	13.50" 343 mm				
1099081	RVL988-1350R						
1099082	RVL988-1350L						

990/992

Replaces	Part Number	Weight	Dimensions			Top Plates
			Length	Thickness	2-1/2", 2-3/4", 3.00" and 3-1/2" Lips	
2755470	RVL992-1625C	229.0 lb 103.9 kg	16.25" 413 mm	3.59" 91 mm	RVL992B300C RVL992B300L RVL992B300R	RVL992TPC RVL992TPL RVL992TPR
2755471	RVL992-1725L	247.0 lb 112.0 kg	17.25" 438 mm		RVL2-C4880 Converter RVL2-P75 Pin	
2755472	RVL992-1725R					

Black Cat Wear Parts Ltd. produces after market replacement products designed to work with specific third party wear part systems. Reference to Caterpillar, ESCO, Super V, SV2 and other third party trademarks referred to in this publication are for informational, comparative, and descriptive purposes only. Black Cat Wear Parts Ltd. does not claim any ownership in or license to use any third party trademarks referred to in this publication and is not affiliated with, nor does it make, use or sell any products manufactured by any owner of such trademarks.

www.blackcatwearparts.com
sales@blackcatwearparts.com
 +1-780-465-6666
 1-800-661-6666

**STRONG ENOUGH
TO ANSWER ANY CALL!**
285.1025



BLACK CAT
WEAR PARTS


**RVL
SYSTEMS**

Single Piece RVL System Benefits

- Simple one piece system.
- For non-quarry production scenarios where smooth bottom loader shrouding system is not so critical.
- Sealed pinning system allows for replacements in the field rather than returning to maintenance building



REVOLUTION
A Black Cat Innovation

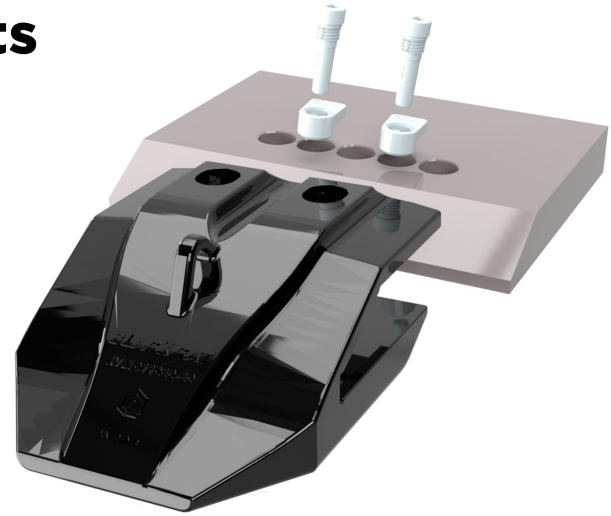

992 With 35DG Bevel

Replaces	Part Number	Weight	Dimensions			Hardware
			Length	Thickness	Lip Thickness	
2755470	RVL2755470-7535	256.0 lb 116.1 kg	16.25" 413 mm	2.37" 60 mm	3.00" 76 mm	RVL2-C7553 RVL2-P80
2755471	RVL2755471-7535	284.0 lb 128.8 kg	17.25" 438 mm			
2755472	RVL2755472-7535					

993 With 35DG Bevel

Replaces	Part Number	Weight	Dimensions			Hardware
			Length	Thickness	Lip Thickness	
2755470	RVL2755470-9035	275.0 lb 124.7 kg	16.25" 413 mm	2.50" 64 mm	3.50" 89 mm	RVL2-C7553 RVL2-P90
2755471	RVL2755471-9035	307.0 lb 139.3 kg	17.25" 438 mm			
2755472	RVL2755472-9035					

994 With 22.5DG Bevel

Replaces	Part Number	Weight	Dimensions			Hardware
			Length	Thickness	Lip Thickness	
1099030	RVL1099030	345.0 lb 156.5 kg	17.50" 445 mm	2.75" 70 mm	4.00" 102 mm	RVL2-C7553 RVL2-P100
1176805	RVL1176805	389.0 lb 176.4 kg				
1176806	RVL1176806					

994 With 30DG Bevel

Replaces	Part Number	Weight	Dimensions			Hardware
			Length	Thickness	Lip Thickness	
1099030	RVL1099030-30	345.0 lb 156.5 kg	17.50" 445 mm	2.75" 70 mm	4.00" 102 mm	RVL2-C7553 RVL2-P100
1176805	RVL1176805-30	389.0 lb 176.4 kg				
1176806	RVL1176806-30					

Black Cat Wear Parts Ltd. produces after market replacement products designed to work with specific third party wear part systems. Reference to Caterpillar, ESCO, Super V, SV2 and other third party trademarks referred to in this publication are for informational, comparative, and descriptive purposes only. Black Cat Wear Parts Ltd. does not claim any ownership in or license to use any third party trademarks referred to in this publication and is not affiliated with, nor does it make, use or sell any products manufactured by any owner of such trademarks.

www.blackcatwearparts.com
sales@blackcatwearparts.com
+1-780-465-6666
1-800-661-6666

**STRONG ENOUGH
TO ANSWER ANY CALL!**
285.1025