



- Cost effective solution to protect high wear areas
- Base welds to high wear areas
- Caps are easily changed without hammers or cutting torches



Insert T-Nut into base. Rotate 90 degrees.




Cap completely covers base and holds nut captive.



Cap is held In place with single bolt.

Part Number	Description	Dimensions	Weight	Hardware
MAWC1008B	Base	9.00" x 7.00" x 1.60" 229 mm x 178 mm x 41 mm	20.2 lb 9.16 kg	Bolt - MAWC 050BPT Nut - MAWC 050NPT
MAWC100802	Low Profile Cap	10.00" x 8.00" x 2.00" 254 mm x 203 mm x 51 mm	26.1 lb 11.8 kg	
MAWC1209B	Base	11.00" x 8.00" x 2.00" 279 mm x 203 mm x 51 mm	34.6 lb 15.7 kg	Bolt - MAWC 075BPT Nut - MAWC 075NPT
MAWC120903	Low Profile Cap	12.00" x 9.00" x 3.00" 305 mm x 229 mm x 76 mm	47.7 lb 21.6 kg	
MAWC1209035	Standard Cap	12.00" x 9.00" x 3.50" 305 mm x 229 mm x 89 mm	63.5 lb 28.8 kg	
MAWC120904	Heavy Duty Cap	12.00" x 9.00" x 4.00" 305 mm x 229 mm x 102 mm	80.6 lb 36.6 kg	
MAWC1409275T	Tapered Cap	14.00" x 9.00" x 2.75" 356 mm x 229 mm x 70 mm	52.6 lb 23.9 kg	

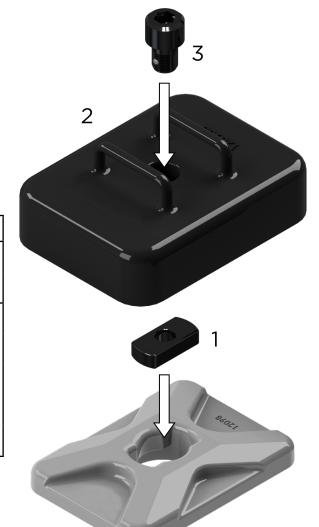



REVOLUTION

A Black Cat Innovation



Standard



Tapered



Heavy Duty



Low Profile